



## POLI-FLEX GLITTER

### Product Information

POLI-FLEX GLITTER is a thermally transferable flex-film and is suitable to transfer onto textiles like cotton, mixtures of polyester/cotton and polyester/acrylic. POLI-FLEX can be used for lettering on T-shirts, sport & leisure wear, sport bags and promotional articles.

POLI-FLEX GLITTER can be cut with all current plotters. We recommend using a standard 45° knife. After weeding the cut flex film is transferred by heat press. The polyester liner should be removed warm. Afterwards we recommend pressing the material for another 2 sec. with the same parameters.

POLI-FLEX GLITTER is covered with a self adhesive polyester liner, enabling the possibility to reposition the motive.

Nylon and textiles with hydrophobic impregnation are not suitable for heat transfer. In this case we recommend using POLI-FLEX NYLON.

Guarantee for a secure and long-lasting bond of POLI-FLEX GLITTER is only given when following the specified temperature and pressure conditions.

#### We recommend evaluation on test material.

Due to the various influences which occur from production and transfer of plotter letterings, consistency of the carrier materials and also washing and cleaning conditions, product liability of course can only cover the unprocessed material.

### Technical Data

Carrier:	PET-film
Adhesive:	Polyurethane-hotmelt
Thickness [mm]:	0,11 +/- 5 %

### Transfer Conditions

Temperature:	155° - 165° C
Pressure:	3,5 bar [medium pressure]
Time:	17 – 20 sec.

### Wash resistance

Wash resistance:	60° C Suitable for dry-cleaning. Wash textile inside out.
------------------	---

### Standard Dimensions


500 mm x 25 m

500 mm x 10 m


**434 Glitter White**




**437 Glitter Green**

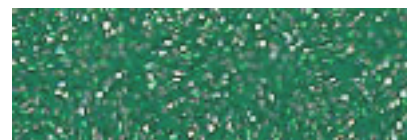

**435 Glitter Silver**

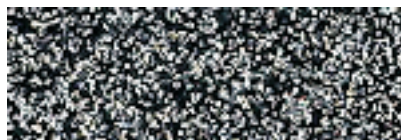

**438 Glitter Red**

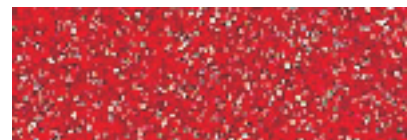

**436 Glitter Blue**



**439 Glitter Gold**



#### POLI-TAPE Klebefolien GmbH

Zeppelinstraße 17

53424 Remagen – GERMANY

Phone: +49 (0) 2642 – 9836 0

Fax: +49 (0) 2642 – 9836 37

E-Mail: [info@poli-tape.de](mailto:info@poli-tape.de)

Internet: [www.poli-tape.de](http://www.poli-tape.de)

The following technical details are issued to the best of our knowledge, however, without any responsibility for results due to several different kinds of material and application processes. Therefore, we highly recommend that before every usage a test should be conducted on the original material.